



- Shelving Notes**
1. Shelving Tracks to be securely and permanently fastened to the wall.
  2. Shelving should be suitable for 20 pounds per linear foot of shelf.
  3. When shelving meets corners, shelving should wrap around.
  4. Tracks to be installed the full useful height of the space to allow future expansion.
  5. Shelf widths differ. Track arms vary to accommodate shelving.
  6. All track mounted shelving systems to be of same type.

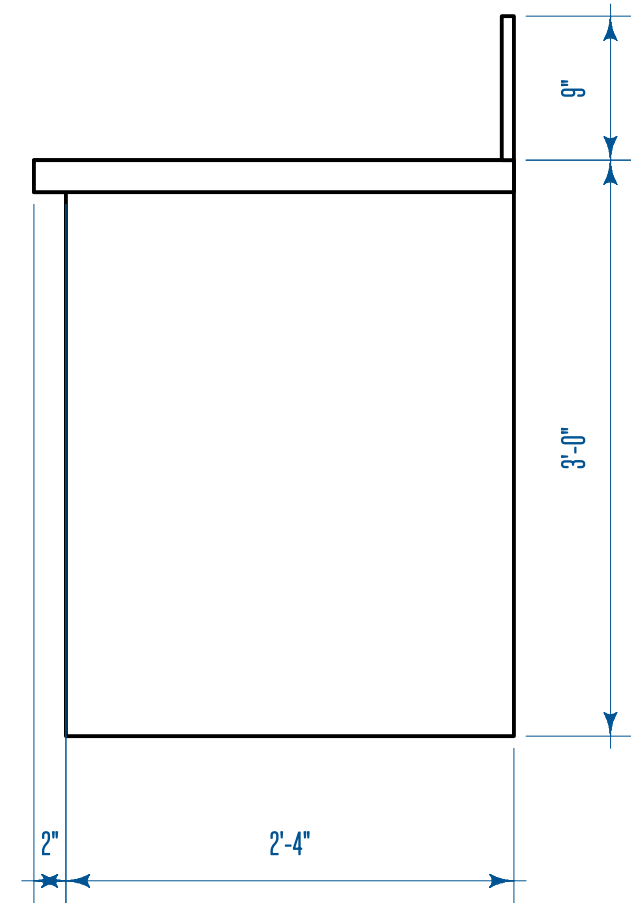

- 3 Track Mounted Shelf Reference  
4 Not To Scale

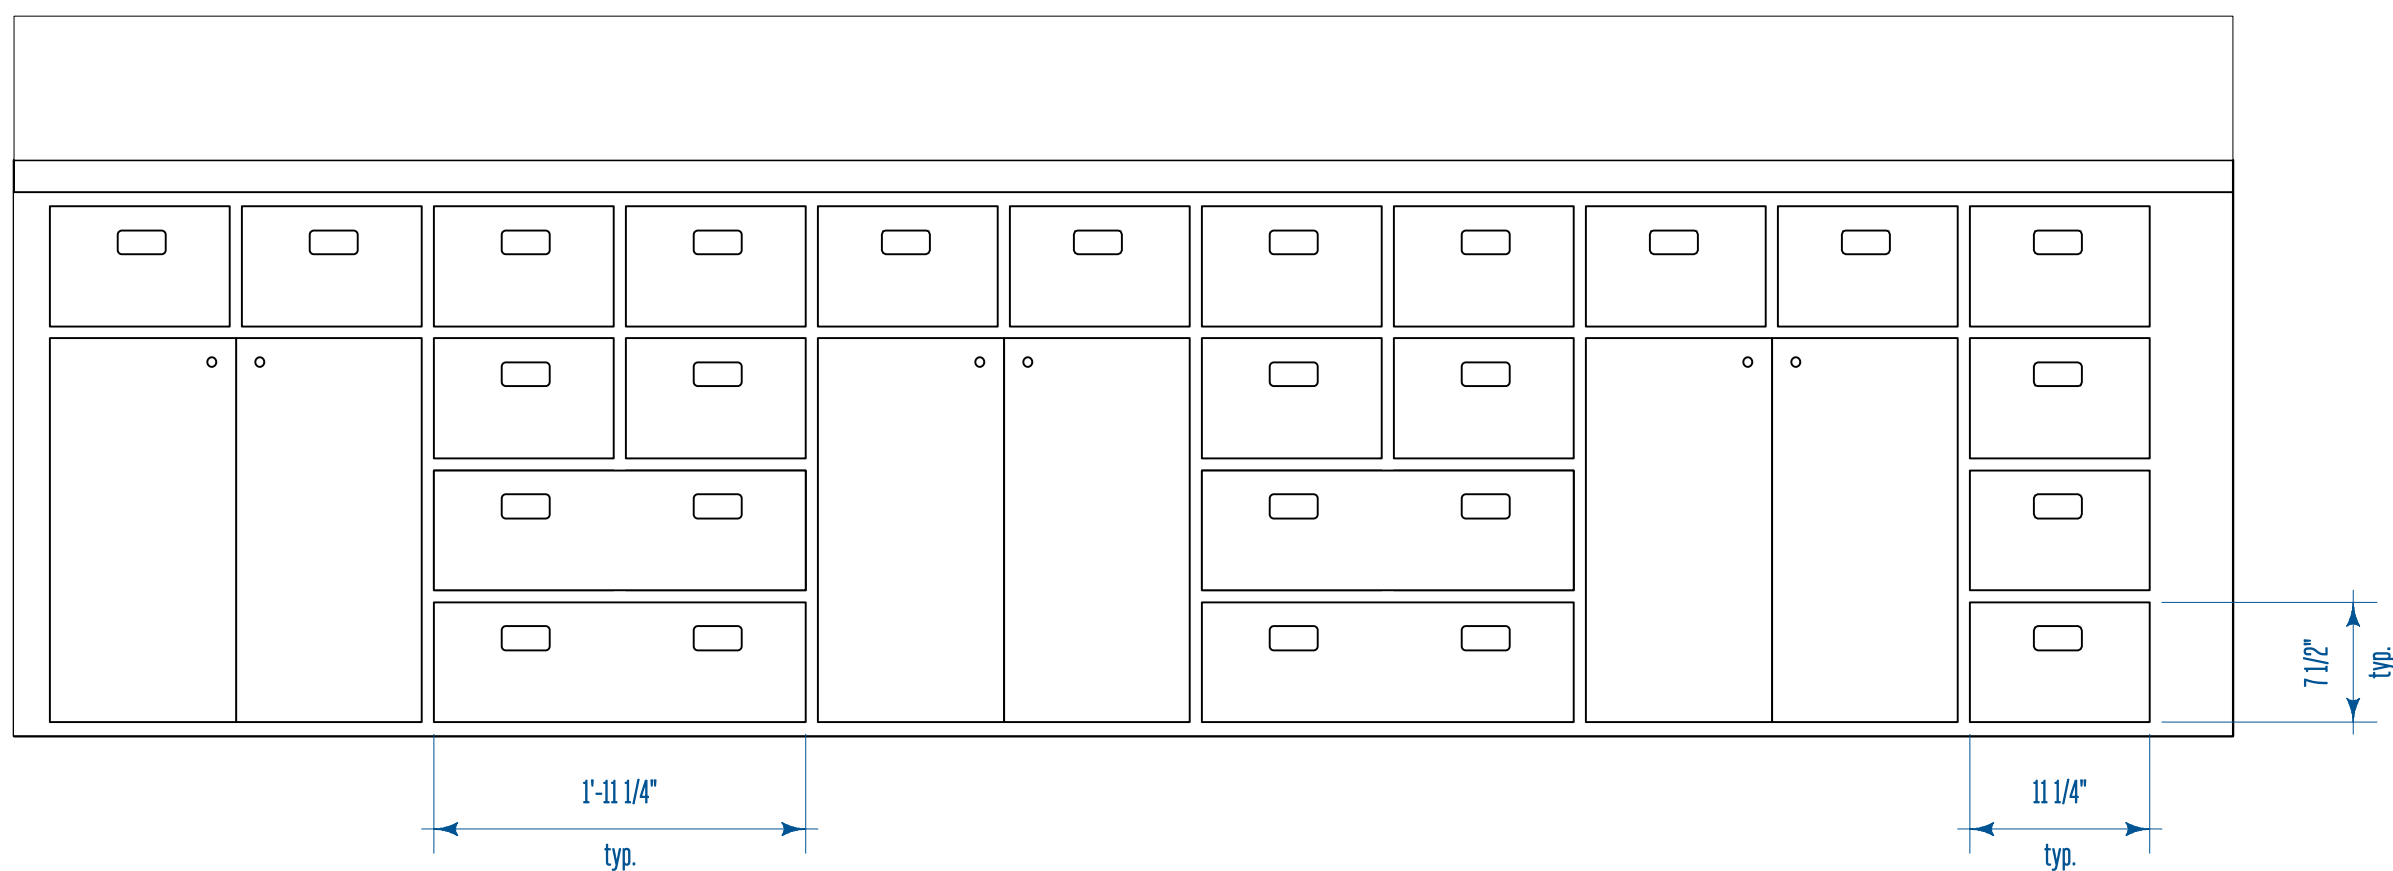

- Cabinet Notes**
1. Smooth Formica or Similar Covering on Countertop.
  2. 9" Formica Backsplash
  3. Cabinets with Adjustable Shelves Below.
  4. Drawers Below with Configurable Partitions.
  5. All Drawers and Cabinet Pulls to be Flush Mount and Recessed.

## Props Clean Fabrication - 219

Two River Theater  
Production Support Facility  
Shop Elevations and Detail Specifications  
Scale: As Noted  
Date: 7/29/2017  
rev2.01 fcm

